




Sternreiter



www.Sternreiter.com
Imported by
North Coast Imports, Inc.
www.NorthCoastImports.com

Congratulations! You are the new proud owner of a beautiful clock of the finest quality. These timepieces are constructed much the same way as they have been hundreds of years ago. For this reason much of the technology involved is no longer completely familiar to our Twenty-First Century lives. Please read the instructions completely to avoid any problems!

1. **SAVE ALL PACKING AND PAPERWORK!** Although each clock has been carefully inspected and run immediately before shipment you will need everything in case of any problems.
2. Carefully remove the clock from the box and surrounding packaging.
3. Open the back door of the clock by gently pulling on the round handle. The door is hinged on the opposite (right hand) side.
4. Find the key. It will have a thicker end and a thinner end.
5. Use the thicker end to wind the spring **COUNTER**-clockwise, the thinner side to set the time. For a full week's run, be sure to wind the until the key comes to a complete stop.

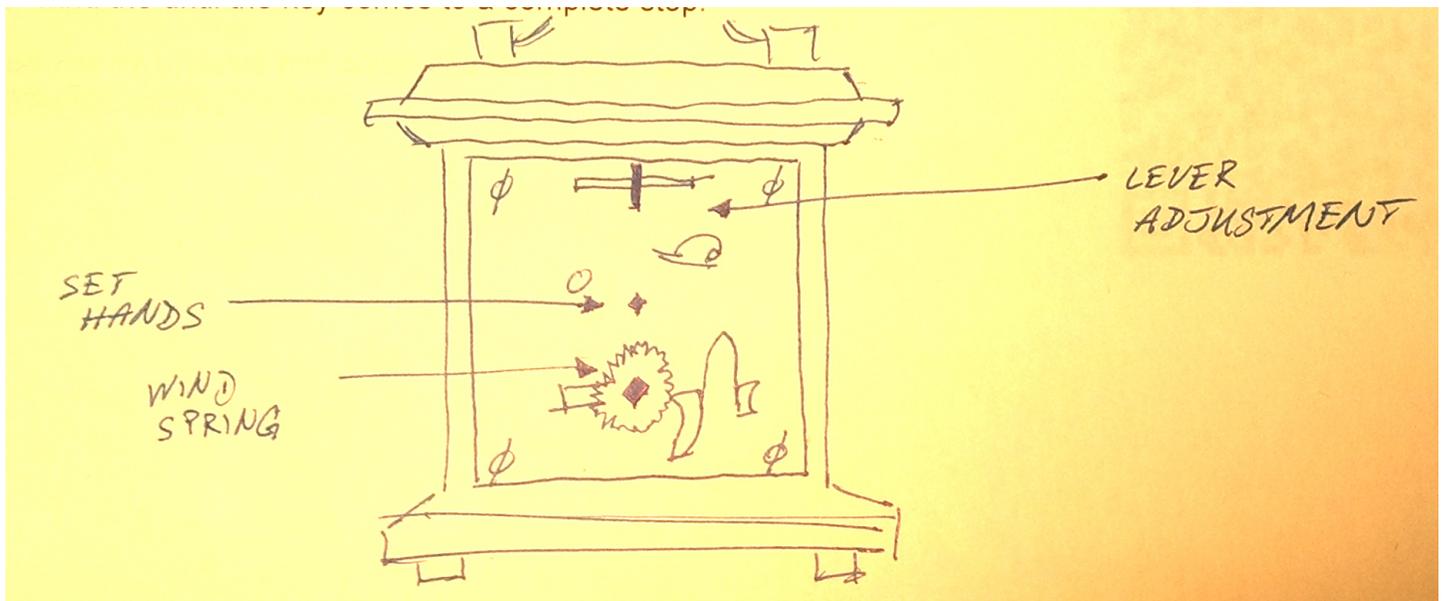


The clock should begin running. Listen for a ticking sound. It may be necessary to gently rock the clock to start the balance wheel.

To regulate the time:

Some minor regulation may be necessary. Inside the back of the clock, you will see a silver-colored lever at the top of the mechanism. This is the "lever adjustment" for regulating the speed of the clock. If you look through the top window, you should be able to see the other end of this lever connected to the center of the balance wheel.

View from the top:
(through the window)

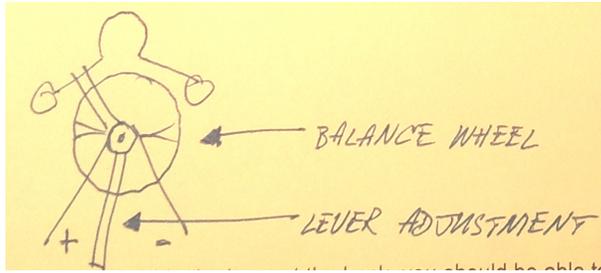

Move this lever adjustment from the back of the clock. If you slide the lever at the back, you should be able to see it move through the window at the top. **Don't force anything!** This should be very easy to move.

If you have any problems:

Call the store where you purchased the clock. Many problems can be solved over the phone. Otherwise they can direct you to where and how to send for a repair or replacement. See your included warranty information.

Most Common Errors When Installing a Mechanical Clock



If the clock does not function properly make sure **the clock is wound fully**. By the end of the week, the three arbors will run down. In most cases, mechanical clocks cannot be overwound. However, since this clock is particularly small and delicate, extra care should be taken not to wind the clock past the end of the wind. You should be able to feel the key come to a stop when you wind the clock to the end. This spring should be wound tightly, but be careful not to wind the key past the stopping point!

If the Calendar dial does not seem to be moving, double check to make sure you are in the proper AM or PM setting. Move the minute hand (larger hand) clockwise and watch the lower dial. When the date needle jumps, you have found the 12:00 midnight. Adjust the time from here.

Constant running of mechanical parts causes wear, but proper servicing will allow your timepiece to last for generations. These clocks should be oiled and cleaned by a certified clock technician every 3-7 years.

Whatever the problem, if something doesn't seem to be working properly,
DO NOT USE FORCE! Reread the instructions or call the dealer from where you purchased the clock.

For further help, as well as updates and comprehensive information, visit www.NorthCoastImports.com/instructions.